


Global Partner. Local Friend.

SV-P Series



for a greener tomorrow

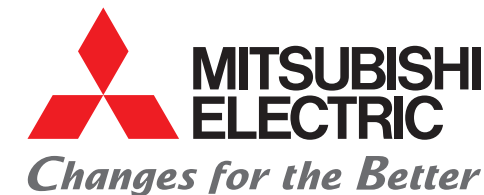

FACTORY AUTOMATION

MITSUBISHI NC EDM SYSTEMS SV-P Series

SV-P series



Visit us on



[YouTube] [YouTube logo] is a trademark or registered trademark of Google Inc.

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO 14001 (standards for environmental management systems) and ISO 9001 (standards for quality assurance management systems)



MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3 MARUNOUCHI,
CHIYODA-KU, TOKYO 100-8310, JAPAN



GLOBAL IMPACT OF MITSUBISHI ELECTRIC



Through Mitsubishi Electric's vision, "Changes for the Better" are possible for a brighter future.


Changes for the Better

We bring together the best minds to create the best technologies. At Mitsubishi Electric, we understand that technology is the driving force of change in our lives. By bringing greater comfort to daily life, maximizing the efficiency of businesses and keeping things running across society, we integrate technology and innovation to bring changes for the better.

Mitsubishi Electric is involved in many areas including the following

- Energy and Electric Systems**
A wide range of power and electrical products from generators to large-scale displays.
- Electronic Devices**
A wide portfolio of cutting-edge semiconductor devices for systems and products.
- Home Appliance**
Dependable consumer products like air conditioners and home entertainment systems.
- Information and Communication Systems**
Commercial and consumer-centric equipment, products and systems.
- Industrial Automation Systems**
Maximizing productivity and efficiency with cutting-edge automation technology.

Mitsubishi Electric continues the challenge to be the only one FA machine and systems supplier delivering total customer satisfaction.

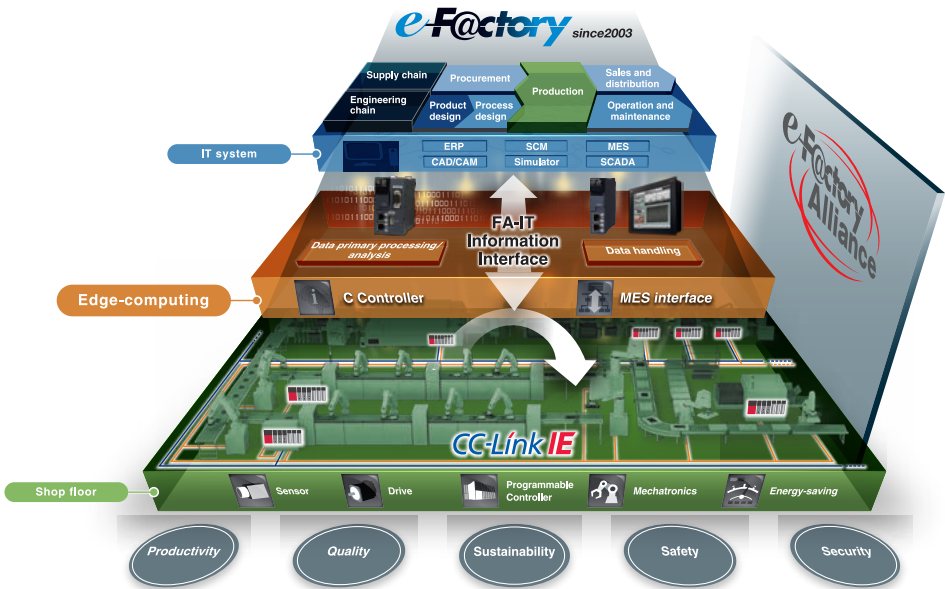

Mitsubishi Electric is a world-leading general electrical and electronic products manufacturer with wide-ranging business reach, from appliances for the home to systems used in outer space. Global-scale business development is in five business domains: heavy electrical machinery and systems, industrial automation, information and communication systems, electronic devices, and home appliances. Producing general electrical machinery for over 90 years, as Mitsubishi Electric's Factory Automation Systems Business Group, we have supported manufacturing in Japan, China, and Asia, and around the globe. In doing so, we have accumulated and refined technologies for FA control, drive control, automation, and manufacturing that are utilized to expand and improve a vast product lineup, such as controllers, drives, and automation and power distribution control products. In addition to product components like those listed above, we are quick to propose systems such as e-F@ctory and iQ Platform as solutions for production site innovation. As a comprehensive supplier of FA products and systems, Mitsubishi Electric will continue to respond to the voice of customers and deliver products of the utmost quality throughout the world.

INDEX

| | | | |
|--|----|---|----|
| 1. History of Mitsubishi Electric EDMs | 3 | 8. Productivity | 17 |
| 2. SV-P Series | 5 | 9. Operability | 19 |
| 3. NC-EDM Systems | 7 | 10. Automation Support | 23 |
| 4. Line up | 9 | 11. Power Supply / Control Specifications and Options | 25 |
| 5. Functions and Features | 11 | 12. Tooling | 27 |
| 6. Samples | 13 | 13. Preparation for Machine Installation / Cautions | 29 |
| 7. Machining Accuracy | 15 | 14. Production Bases / Solutions | 33 |

The history of Mitsubishi Electric EDMs is the history of electrical-discharge machining

1964~



1964
DM201
Production started 1964
Thyristor power supply
Hydraulic servo system



1965
DM500-DE90T
Began shipment in Nov. 1965




1967
DM250-DE30T
Began shipment in Feb. 1967
Transistor pulse power supply



1971
DM100
Began shipment in Dec. 1971



1972
DM300N-EP120M
Began shipment in Jul. 1972



1974
DK700
Began shipment in Oct. 1974




1976
DK280
Began shipment in Apr. 1976



1978
DK140
Began shipment in Sep. 1978

1980~



1980
DK360NC
Began shipment in May 1980



1982
M30
Began shipment in Jan. 1982
Motor servo system




1982
M35C2
Began shipment in May 1982



1982
M55
Began shipment in Dec. 1982



1982
M25C3
Began shipment in Dec. 1982




1982
M55C6
Began shipment in Dec. 1982
Equipped with 16bit CNC



1986
M25KC4
Began shipment May 1986
Equipped with ultralow-wear power supply (slope control system)



1986
M35K
Began shipment in May 1986



1987
M85KW
Began shipment in Feb. 1987



1988
M115K
Began shipment in Jan. 1988



1988
EML20
Began shipment in Aug. 1988



1989
M35J
Began shipment in May 1989



1989
M35S
Began shipment in Dec. 1989


1990~



1990
M65E
Began shipment in Mar. 1990



1991
V35F
Began shipment in Feb. 1991
Equipped with 32bit CNC and FUZZY Control



1992
VP35F
Began shipment in Jun. 1992
NS powder specifications



1994
ADMAQ-E
Began shipment in Oct. 1994



1994
VX10
Began shipment in Dec. 1994



1995
VX20
Began shipment in Jan. 1995



1995
EX8
Began shipment in Jan. 1995



1996
EX30
Began shipment in Jun. 1996



1996
EDSCAN8E
Began shipment in May. 1996



1999
EA12E
Began shipment in Aug. 1999
Equipped with 64bit CNC



1999
EA8
Began shipment in Oct. 1999

2000~



2001
VA10
Began shipment in Apr. 2001



2001
MA2000
Began shipment in May 2001
Equipped with thermal displacement compensation



2004
EA8P
Began shipment in Feb. 2004



2004
EA12V
Began shipment in Apr. 2004
Equipped with V power supply (tungsten carbide circuit standard equipment)



2006
EA8PV
Began shipment in Jun. 2006
Equipped with ultrafine finish circuit (NP circuit)



2007
EA28V
Began shipment in Jan. 2007



2008
EA12V ADVANCE
Began shipment in Feb. 2008
Equipped with ADVANCE control device



2008
EA28V ADVANCE
Began shipment in Feb. 2008



2008
EA8PV ADVANCE
Began shipment in Feb. 2008

2010~



2014
EA8S
Began shipment in Feb. 2014



2015
EA12S
Began shipment in Mar. 2015



2016
EA8PS
Began shipment in Feb. 2016



2016
EA12PS
Began shipment in Feb. 2016

2018

SV12P



Next-generation machine incorporating the Mitsubishi Electric's AI technology (Maisart) and control unit (D-CUBES) to pursue both high accuracy and high productivity

"Challenge!"
with
"AI technology"

High precision machine

SV-P Series

 Maisart

 D-CUBES



Die-sinker EDM pursuing both high accuracy and high productivity



SV-P Series


NC-EDM Systems

An extensive product lineup ready to support the most diversified needs, from high-precision machining of small workpieces to highly productive machining of large workpieces. Mitsubishi Electric die-sinker EDMs offer comprehensive solutions that contribute to improving the productivity of customers' facilities.

High precision machine

SV-P Series

High-end model incorporating the AI technology (Maisart) to pursue both accuracy and productivity

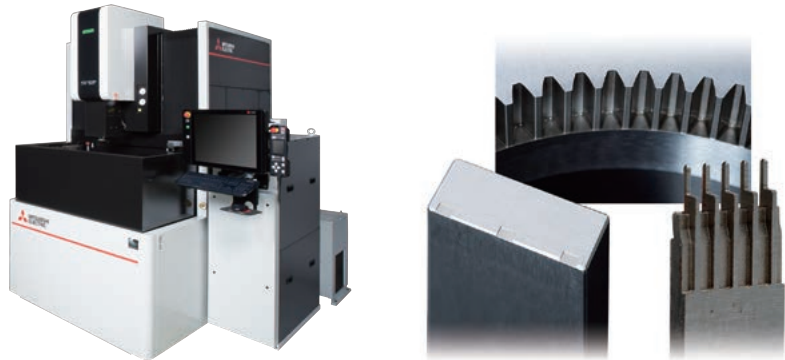

High precision machine

EA-PS Series


High-grade model compatible for various uses



Productivity machine

EA-S Series

Supports various machining needs in pursuit of higher productivity

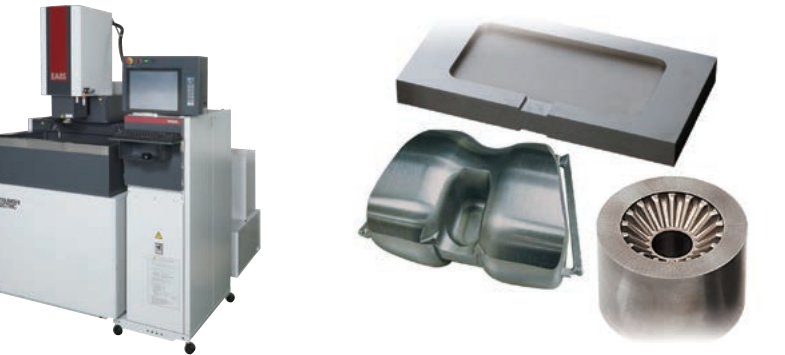

Large-size high performance machine

EA-V ADVANCE Series

Standard model pursuing high performance and high productivity



Line up

Equipped with the latest IoT-compatible control unit for stable machining and higher productivity.

Compact high precision machine


SV8P

Machining accuracy
±3μm^(*) achieved

(*)The machining accuracy follows the Mitsubishi Electric machining conditions.



Automatic elevation working tank specification (standard)



High precision machine

SV12P

Machining accuracy
±3μm^(*) achieved

(*)The machining accuracy follows the Mitsubishi Electric machining conditions.



Automatic elevation working tank specification (standard)

- Guaranteed accuracy conditions
- Workpiece:
SKD11 20mm(7.89")
HRC56-57 after quenching
Sub-zero treatment
High-temperature tempering
Stabilization treatment
 - Electrode:
□ 5mm(.197) 4-copper
 - Room temperature: 20±1°C

Standard function


- Adaptive control (Maisart/IDPM3)
- NP2 circuit
- Lotus Leaf Texture (LLTX)
- HGM2 circuit
- HPS circuit
- XYZ Liner scale
- Thermal buster
- Dielectric fluid automatic supply
- Thin LCD operation box
- Granite table¹⁾
- Automatic elevation working tank specification
- SS Jump
- Built-in scheduler
- Anti-virus protection

Option

- High-rigidity C-axis²⁾
- High-accuracy built-in spindle
- Automatic clamp
- LS/MVH Tool changer
- Programmable flushing function
- Dielectric fluid suction function
- GV120P power supply
- SP power supply²⁾
- 3D data import
- External signal output
- Warning light (Tower/Built-in)


¹⁾ Only SV8P ²⁾ When the SP power supply is used, machine installation dimensions differ. Detail on the other page

SV8P

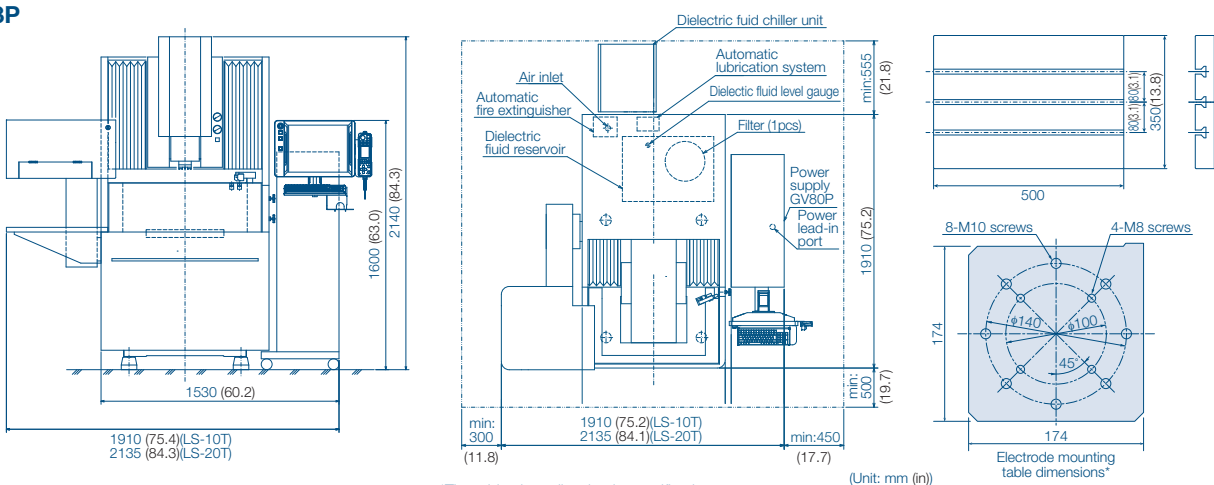

(Unit: mm (in))
*The table above lists basic specifications.
Specifications are different from the table above when the high-rigidity C-axis/automatic clamp (option) is attached.

SV12P

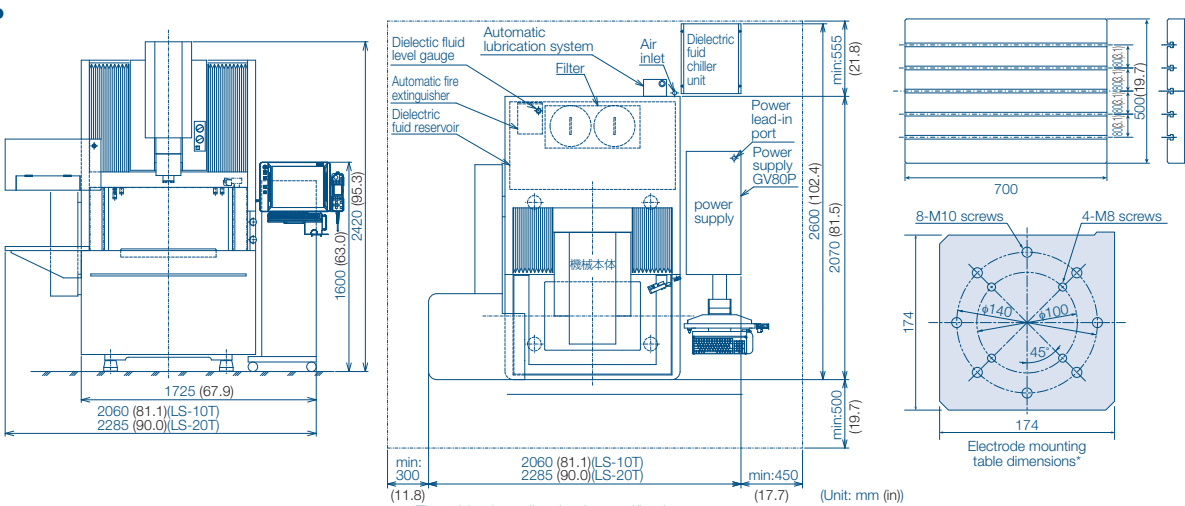

(Unit: mm (in))
*The table above lists basic specifications.
Specifications are different from the table above when the high-rigidity C-axis/automatic clamp (option) is attached.

Machine main unit (standard specifications)

| Model | | SV8PM | SV12PM |
|----------------------------|--|------------------------------------|------------------------------------|
| Machine main unit | Dimensions (W x D x H) [mm(in)] | 1530×1910×2140 (60.2×78.7×83.5) | 1725×2070×2420 (67.9×83.9×94.5) |
| | Total system weight [kg(lb.)] | 2000(4409) | 3500(7716) |
| Axial travel | (X×Y×Z) | 300×250×250 (11.8×9.8×9.8) | 400×300×300 (15.7×11.8×11.8) |
| | Distance between table and electrode mounting surface [mm(in)] | 150-400(5.9-15.7) | 200-500(7.9-19.7) |
| Spindle | Max. electrode weight [kg(lb.)] | 25(55) | 80(176.4) |
| | System | Automatic elevation system | |
| Working tank | Inner dimensions (W x D x H) [mm(in)] | 800×520×300 (31.5×20.5×11.8) | 950×700×450 (37.4×27.6×17.7) |
| | Fluid level adjustment range (from top of table) [mm(in)] | 60-250(2.4-9.8) (19.7-13.8) | 65-400(2.6-15.7) (27.6-19.7) |
| Table | Dimensions (W x D) [mm(in)] | 500×350(Granite table) | 700×500 |
| | Max. workpiece dimensions (W x D x H) [mm(in)] | 770×490×200 (30.3×19.3×7.9) | 900×650×350 (35.4×25.6×13.8) |
| | Distance between floor and top of table [mm(in)] | 900(35.4) | 900(35.4) |
| | Max. workpiece weight [kg(lb.)] | 550(1213) | 1000(2205) |
| | T-slot | 3 slots at 13-80mm pitch | 5 slots at 12-80mm pitch |
| Dielectric fluid reservoir | Capacity (initial dielectric fluid supply amount) [l(gal.)] | 165(43.6)(270(68.7)) | 380(100.4)(470(124.1)) |
| | Filtering system | Paper filter x 1 | Paper filter x 2 |
| | Dielectric fluid chiller unit | Unit cooler | |

* Without Dielectric fluid chiller unit.

Distance between table and electrode mounting surface

| | | EROWA ITS | 3R MACRO | 3R Combi |
|--------|-------------------------------|-----------------------------|-----------------------------|-----------------------------|
| SV8PM | High-rigidity C-axis [mm(in)] | 150 to 400 (5.9 to 15.7) | 133 to 383 (5.2 to 15.1) | 133 to 383 (5.2 to 15.1) |
| | Spindle [mm(in)] | 150 to 400 (5.9 to 15.7) | 133 to 383 (5.2 to 15.1) | 143 to 393 (5.6 to 15.5) |
| | Automatic clamp [mm(in)] | 150 to 400 (5.9 to 15.7) | 148 to 398 (5.8 to 15.7) | 158 to 408 (6.2 to 16.1) |
| SV12PM | High-rigidity C-axis [mm(in)] | 200 to 500 (7.9 to 19.7) | 183 to 483 (7.2 to 19.0) | 183 to 483 (7.2 to 19.0) |
| | Spindle [mm(in)] | 200 to 500 (7.9 to 19.7) | 183 to 483 (7.2 to 19.0) | 193 to 493 (7.6 to 19.4) |
| | Automatic clamp [mm(in)] | 200 to 500 (7.9 to 19.7) | 198 to 498 (7.8 to 19.6) | 208 to 508 (8.2 to 20.0) |

C-axis/ATC (option)

| | | 3R MACRO | 3R Combi | EROWA ITS | EROWA COMBI |
|--------|-----------------------|--------------------------------|----------|-----------|-------------|
| C-axis | Max. electrode weight | 1022(226) 80(176) [kg(lb.)] | ○ | ○ | ○ |
| | Speed (rpm) | 1 to 30 [min ⁻¹] | ○ | ○ | ○ |
| | Max. electrode weight | 10(22) ¹⁾ [kg(lb.)] | ○ | ○ | ○ |
| | Speed (rpm) | 1 to 1500 [min ⁻¹] | ○ | ○ | ○ |

¹⁾ For macro Jr of 3R combi and Compact of EROWA COMBI, the weight is 2.5 kg (5.5lb.) /electrode.

| | | 3R MACRO | 3R Combi | EROWA ITS | EROWA COMBI |
|-----|---------|---------------------------|--|-----------|-----------------|
| ATC | LS-10T | Max. electrode dimensions | 54×54×200 [mm(in)] (2.1×2.1×7.9) | ○ | ○ ⁴⁾ |
| | | Max. electrode weight | 5kg (11lb) /electrode ³⁾ Magazine total: 20kg (44lb) | ○ | ○ ⁷⁾ |
| | LS-20T | Max. electrode dimensions | 54×54×200 [mm(in)] (2.1×2.1×7.9) | ○ | ○ ⁴⁾ |
| | | Max. electrode weight | 10kg (22lb) /electrode ³⁾ Magazine total: 40kg (88lb) | ○ | ○ ⁷⁾ |
| | MVH-20T | Max. electrode dimensions | 70×70×150 [mm(in)] (2.8×2.8×3.9) | ○ | ○ ⁴⁾ |
| | | Max. electrode weight | 10kg (22lb) /electrode ⁴⁾ Magazine total: 80kg (176lb) ⁵⁾ | ○ | ○ ⁸⁾ |
| | MVH-40T | Max. electrode dimensions | 70×70×150 [mm(in)] (2.8×2.8×3.9) | ○ | ○ ⁴⁾ |
| | | Max. electrode weight | 10kg (22lb) /electrode ⁴⁾ Magazine total: 80kg (176lb) ⁵⁾ | ○ | ○ ⁸⁾ |

²⁾ For MACRO of 3R Combi, the weight is 5kg (11lb.) /electrode, is 2.5kg (5.5lb.) /electrode with MACRO Jr, and Compact of EROWA COMBI, the weight is 2.5kg (5.5lb.) /electrode.

³⁾ For MACRO and MACRO Jr of 3R Combi, the magazine total is 40kg (88lb.).

⁴⁾ For 3R Combi Macro and Macro Jr can be used each other.

⁵⁾ Only the ITS50 specification is available, and the centering plate 50 can be used.

⁶⁾ ITS50 or ITS100 specification available. For ITS100 specification, the Centering plate 100 and 50 can be used.

⁷⁾ Centering plate 50 and the Compact can be used each other.

Delivery machine size

| | | SV8PM | SV12PM |
|-------------|-------------------|------------|------------|
| Without ATC | Width | 1117(44.0) | 1286(50.6) |
| | Height | 2140(84.3) | 2420(95.3) |
| LS type | 10T | 1501(59.1) | 1620(63.8) |
| | 20T | 1726(68.0) | 1845(72.7) |
| MVH type | 20T | 1744(68.7) | 1882(74.1) |
| | 40T ⁷⁾ | 2140(84.3) | 2420(95.3) |

⁸⁾ MVH-40T specification obtained by removing both the ATC main unit and retainer. This is required for installation when using crane and for assembly.

Functions and Features

New functions to further innovate machining performance.



Machining accuracy

Refer to P15-16 ▶

- $\pm 3\mu\text{m}$ pitch accuracy achieved. *1
High rigidity construction is realized by structural change of cast.
- Standard function of "Thermal buster" (Mitsubishi Electric original technology). Temperature change is visualized with "visualization monitor".



- Automatic depth recognition and stable servo control using Maisart make uniform surface finish.



*1 The machining accuracy follows the Mitsubishi Electric machining conditions.

Productivity

Refer to P17-18 ▶



IDPM3

- Machining speed is up to 50% faster with the combination of highly accelerated (1.6G) jump control and adaptive control "IDPM3".
- Suppresses edge wear enables single electrode machining. Electrode cost, setup and machining time are significantly reduced.



Maisart

- Optimize the jump length according to the machining dimension and shape.
- Automatically recognizes distinct depth of machining to improve stability.
- Plunge machining reduces machining time by up to 30%.



Workability

Refer to P20 ▶



- The machine has a large working tank and optimum layout suitable for automation systems (universally designed).
- Visualization of the machine's operation status with the built-in warning light (option).
- The elevation tank provides high accessibility to the machine for setup, and is easily automated.
- Working fluid emitting time is shortened.



Automatic elevation working tank

- Setup time reduced by faster jog speed. Jog speed is customizable.



Max. Jog speed

- Button for elevation working tank



Operability

Refer to P19-22 ▶



- 19 inch touch screen.
- HOME Screen is like a smartphone, you are able to reach various screen by "short-cut menu".
- The Navigation menu supports operation from setup to machining.
- New thin operation box is a standard equipment.
- The best condition is selected by factor selection and narrow down search. Adjustment bar for choosing "Speed" or "Uniformity".



HOME monitor



Visualization monitor



New operation box



Condition search screen

- "Action menu" helps your operation. Table form programming display "ESPER D-CUBES".



ESPER

- Centralized management of consumables. The consumables screen manages usage time and replacement log of consumables.
- Power saving function to reduce power consumption. Reduces standby power consumption during idling at night, etc.




Maintenance contents



Maintenance items




Samples



High speed machining with low electrode wear by IDPM3+SS jump

| | |
|--------------------|------------------|
| Model | SV12P |
| Electrode | Graphite (TTK5) |
| Workpiece | Steel (SKD61) |
| Surface Roughness | Rz12.0μm/Ra2.0μm |
| Machining accuracy | ±0.010mm(.0004") |


- High speed machining using Maisart. (machining depth: 40 mm, rough machining: 1.6 hours).
- Ultimate Low wear machining with IDPM3. (Electrode wear length: reduction by 50% or more compared with the conventional model)



Up to 30% faster submarine gate machining

| | |
|--------------------|------------------------|
| Model | SV8P |
| Electrode | Copper (φ1.2mm(.047")) |
| Workpiece | Steel (STAVAX) |
| Surface Roughness | Rz4.0μm/Ra0.6μm |
| Machining accuracy | ±0.003mm(.00012") |


- Automatic depth recognition and stable servo control using Maisart improve machining stability.
- Jump control according to the machining progress raises the discharging efficiency of sludge, shortening machining time (reduced by up to 30% compared with the conventional model).



Minimum in-corner radius 0.004μm

| | |
|--------------------|----------------------------------|
| Model | SV8P |
| Electrode | Copper (1x3mm with 6 electrodes) |
| Workpiece | Steel (ELMAX) |
| Surface Roughness | Rz0.38μm/Ra0.048μm |
| Machining accuracy | In-corner R0.004mm(.00016") |


- Realizes surface roughness Ra0.048μm with narrow gap circuit and NP2 circuit.
- Realizes in-corner radius accuracy of R0.004mm with shift electrodes machining.



High accuracy φ100mm gear machining

| | |
|--------------------|--------------------------------|
| Model | SV12P |
| Electrode | Copper (φ100mm(3.94")) |
| Workpiece | Steel (YXR3) |
| Surface Roughness | Rz4.5μm/Ra0.7μm |
| Machining accuracy | Tooth backlash 0.010mm(.0004") |

- Large gears can be machined with high accuracy thanks to higher rigidity and the thermal buster function.
- Automatic depth recognition and stable servo control using Maisart make uniform surface finish.



70×80mm cavity machining

| | |
|--------------------|-------------------------------------|
| Model | SV12P |
| Electrode | Copper (70×80mm(2.76"×3.15")) |
| Workpiece | Steel (S-STAR) |
| Surface Roughness | Rz5.0μm/Ra0.7μm |
| Machining accuracy | Bottom flatness 5μm(.0002") or less |


- Automatic depth recognition and stable servo control using Maisart make uniform surface finish, reduction copper electrode low wear, reduction of burr and shortening of machining.
- Bottom of large area is machinable to a flatness within 5μm, Copper electrode wear and burrs are reduced thanks to higher rigidity and the thermal buster function.

Machining Accuracy

Machining from the fine shape to large size shape can be achieved with high accuracy and high productivity.

High Rigidity Construction


High rigidity construction is realized by structural change of cast.
⇒Middle-Large area machining performance is improved.(Uniform machined surface, shortened machining time and suppress of electrode burr)

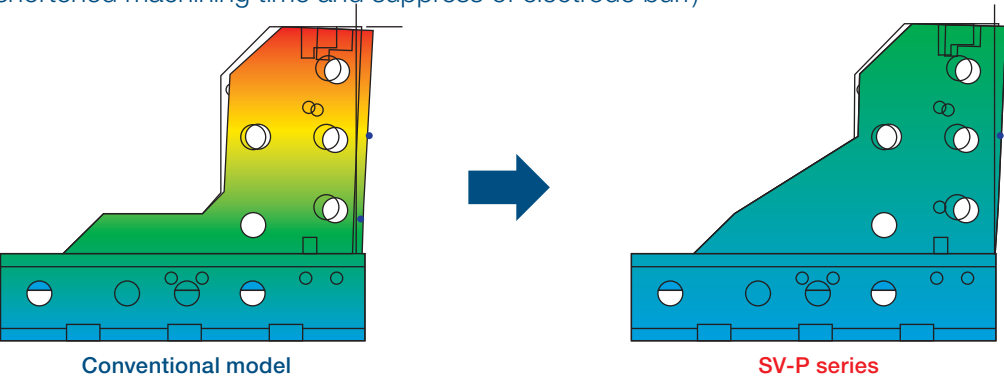


±3μm pitch accuracy achieved*1

- Standard installation of 'Thermal buster'. (in-house original technology)
 - Thermal displacement of machine is reduced by Thermal displacement compensation system and Z-axis cooling mechanism.
 - Temperature change is visualized with 'visualization monitor'.
- High accuracy wide stroke pitch machining is realized with in-house NC equipments + original servo technology +high accuracy drive systems.

*1 Machining results are all based on in-house conditions and measurements.

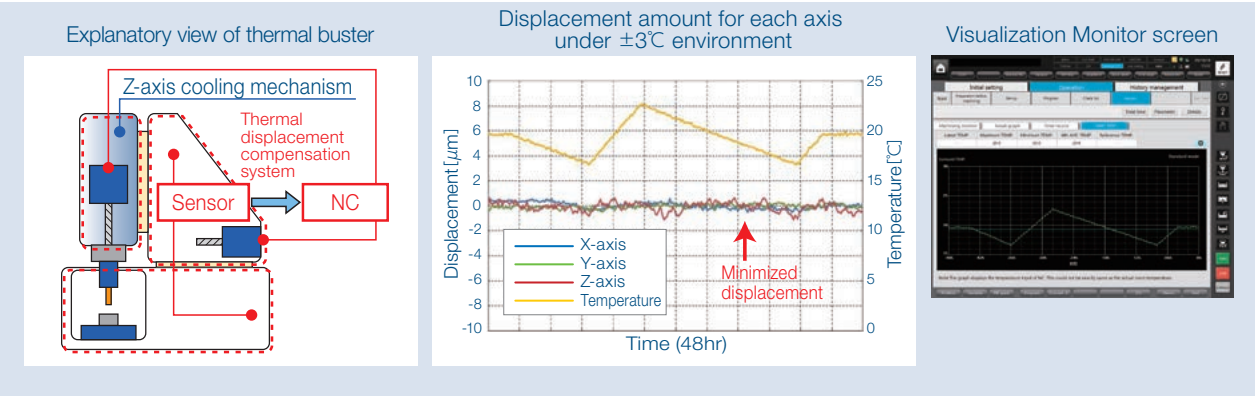


Pitch machining example (SV12P)

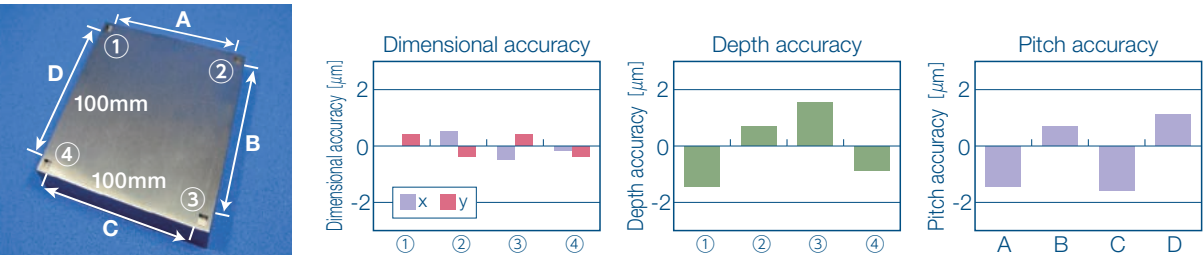


High-rigidity C-axis/High-accuracy spindle

- Highly accurate helical machining and index machining are possible.
- High-accuracy, high-rigidity C-axis with increased permission moment of inertia.

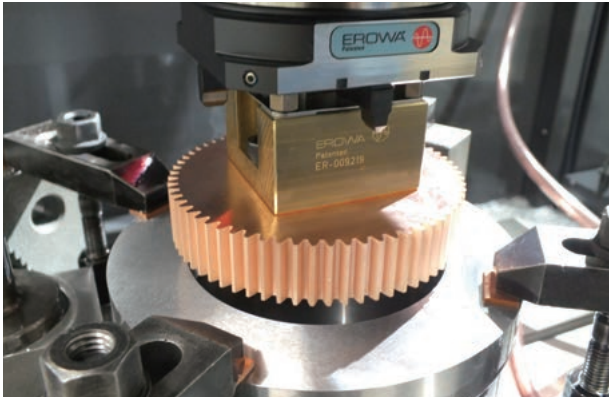


Ultrafine finishing function (NP2 circuit)

- Ultrafine surface roughness of Ra0.050μm is realized by minimizing the floating capacitance.

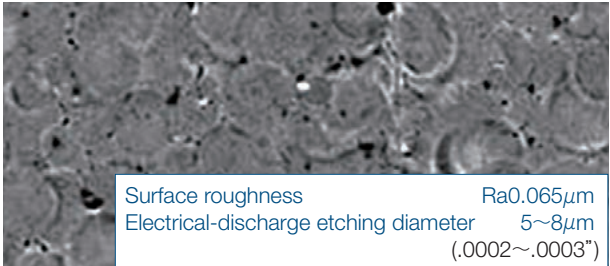


Conventional circuit

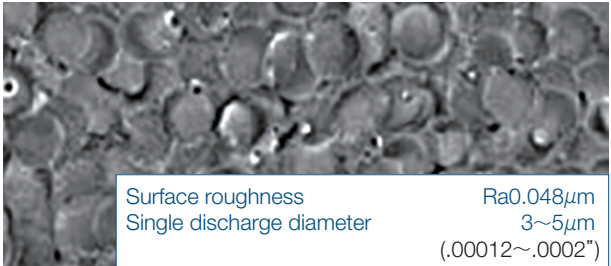



NP2 circuit

Narrow gap circuit

- Compatible with small under-size amounts of 0.015(.0006") to 0.030mm(.0012") per side.
- Small in-corner R realized by suppressing electrode wear for small under-size machining.

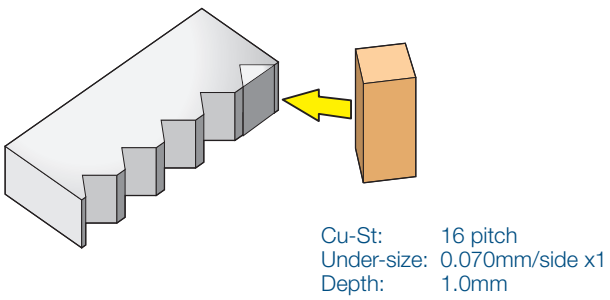

| | Conventional power supply | GV80P |
|-----------------------------|---------------------------|-------|
| Electrode | | |
| Workpiece at 16th machining | | |

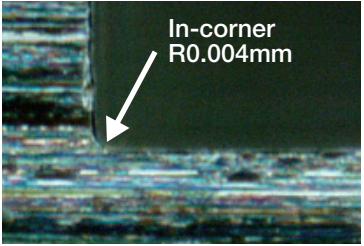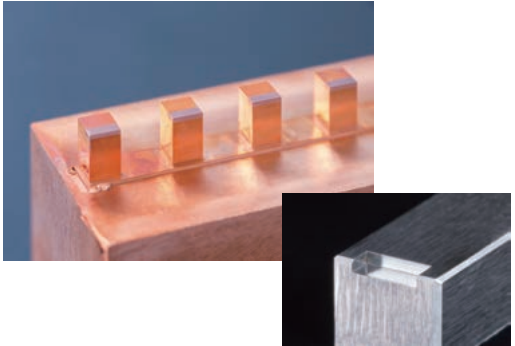

| | |
|--------------------|-----------------------------|
| Workpiece | Steel (ELMAX) |
| Electrode | Copper |
| Under size | 0.03mm(.00012")/side×6 |
| Depth | 0.5mm(.02") |
| Surface Roughness | Rz:0.38μm Ra:0.048μm |
| Machining accuracy | In-corner R0.004mm(.00016") |

- Realizes surface roughness Ra0.048μm with narrow gap circuit and NP2 circuit.
- Realizes in-corner radius accuracy of R 0.004mm with shift electrodes machining.

Productivity


Sensing technology (D-CUBES) and AI technology (Maisart) optimize machining in real time.

AI adaptive control: Maisart

Automatic depth recognition improves stability in deep machining such as gate machining.

- Optimal machining control using AI and high-speed jump both significantly improve machining efficiency.


AI adaptive control that enables stable gate machining at high speed

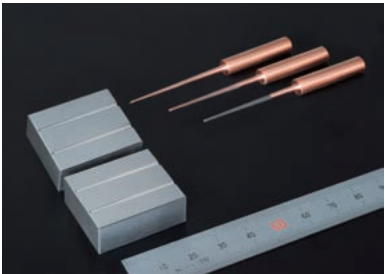

Machining adaptive control: IDPM3

High-speed/Low-wear machining with graphite electrodes

- High speed and low wear improve productivity even when machining with multiple electrodes.
- Suppresses edge wear, enables single electrode machining.

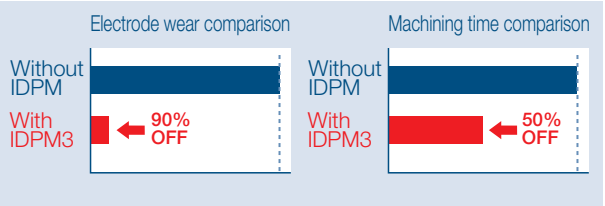


Conventional model: EA-V ADVANCE



Tungsten carbide high-speed machining

- Machining speed is improved up to 60% with copper-graphite electrode by IDPM3.

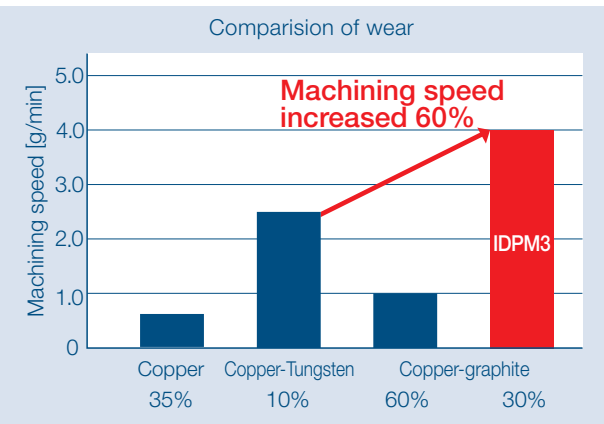


*Machining performance may vary depending on machine specifications and electrode materials.


Machining speed improved with IDPM3 advanced adaptive control and SS Jump jump control

- Mitsubishi Electric's IDPM3 adaptive control is utilized not only for graphite electrode machining, but widely applied for copper electrode machining as well.
- Machining speed increased up to 40% by raising the speed and acceleration of the SS Jump jump control function.

▶SS Jump comparison video

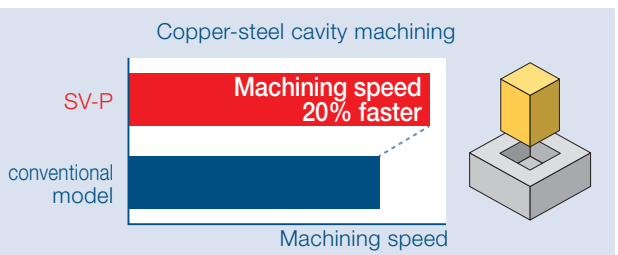

Machining speed for □30mm:depth 9mm machining

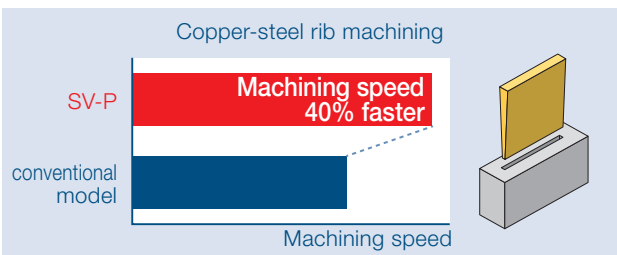

Machining speed for width 20mm:thickness 1mm:depth 20mm machining


New glossy mirror-finish circuit (HGM2 circuit)

- Uniform surface finish with minimized pit by the smaller single spark diameter.


Conventional (GM circuit)
surface roughness: Ra0.1μm
Single spark diameter: 25 to 30μm(.0010~.0012")




New circuit (HGM2)
surface roughness: Ra0.06μm
Single spark diameter: 9 to 17μm(.0004~.0007")

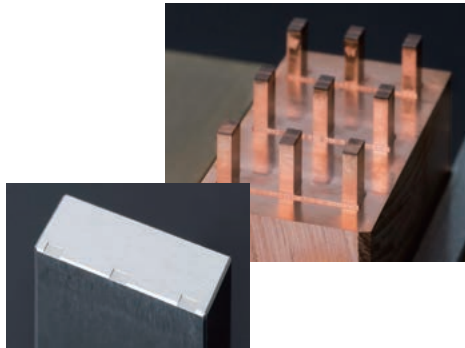


| | |
|--------------------|-----------------------|
| Workpiece | STAVAX |
| Electrode | Copper 1×0.8mm 3×3 |
| Under size | 0.05mm/side×6 |
| Machining depth | 0.2mm |
| Surface roughness | Rz 0.5μm Ra 0.06μm |
| Machining accuracy | In-corner R0.03mm |

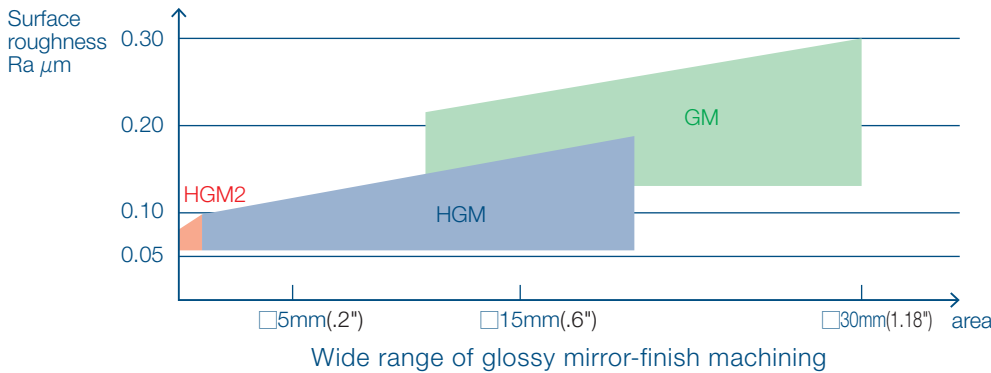

Lotus Leaf Texture (LLTX) LLTX for machining surface with well releasability.

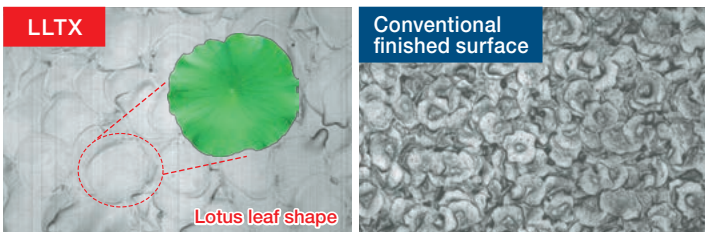


- Machining steel using a copper electrode enables the acquisition of a larger RSm than conventional machining owing to the improvement in release property.
- Extension of the maintenance cycle realizes a longer die service life.

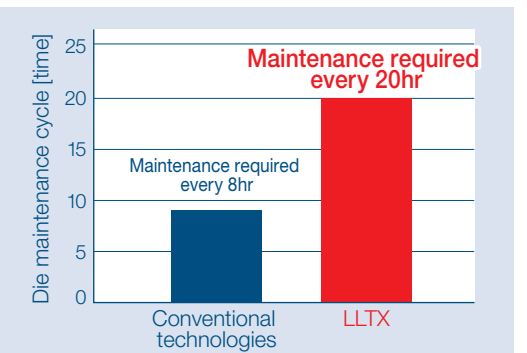


Tungsten carbide machining (HPS circuit:Standard,SP power supply:option)

- Electrode wear of copper electrode dramatically improved.
- Improve tungsten carbide machining at most 50 % by a SP power supply.

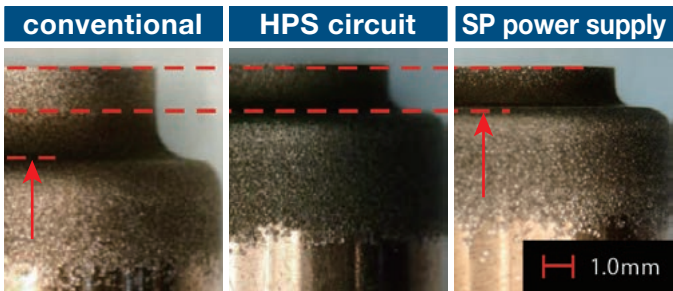


Narrow gap area

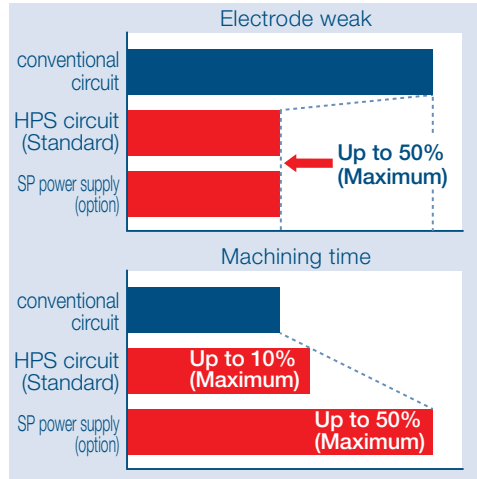

Operability


Control unit

- Information is displayed on a new large19-inch touch screen.
- Keyboard and mouse are standard.
- Intuitive operation is performed by gestures on a multi-touch supporting panel.



Thin LCD operation box

- The new design of the thin liquid crystal manual pendant box improves workpiece setup and saves time.
- The hand-held operation box is equipped with an LED flash light on the back.

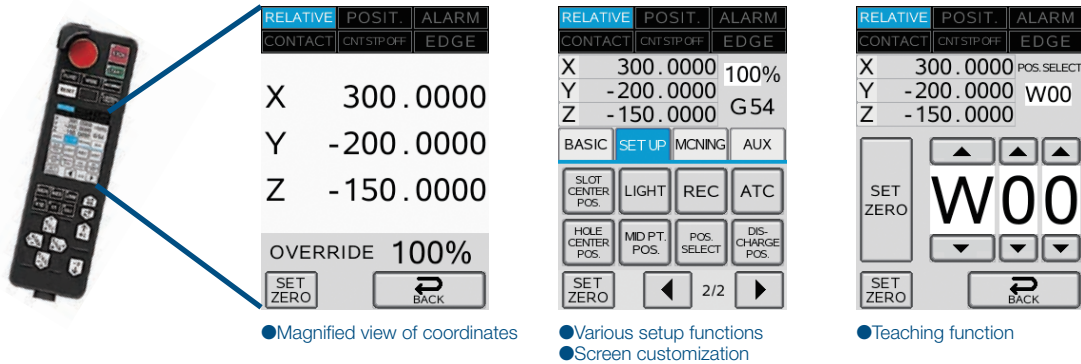

Setup

- Increase the number of T-slots on table for easier workpiece setup.




SV8P




SV12P

- Setup time reduced by faster jog speed. Jog speed can be customizable.

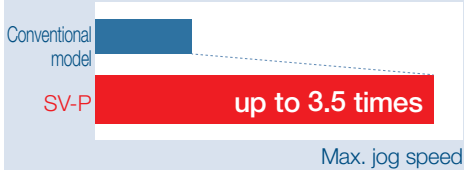

Button for elevation working tank

- Working tank height can be set manually. During machining, the height can be automatically adjusted according to the head height with the automatic fluid setting (ATA).



3-sided automatic elevation tank

- 3-sided automatic elevation tank standardized. Improved access for workpiece setup.



Electrode/Workpiece measurement

- Electrode alignment by electrode measurement screen.
- Workpiece alignment by workpiece measurement screen.




Electrode measurement screen




Workpiece measurement screen


Electrode measurement



Workpiece measurement



Built-in scheduler

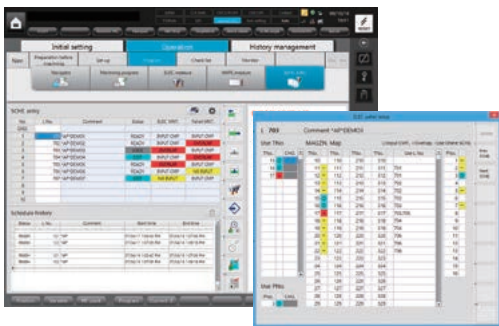

- Continuously run multiple programs on a schedule.
 - Automatic multiple programs operation just by a single machine even without an external controller or machine.
 - Easy to check if no multiple times usage of electrode.
- Schedules can be added and edited during machining.
 - Schedules can be skipped and the registered status (such as waiting) can be changed easily.

Operability




"Fast" and "Ergonomic"operation
Excellent performance with "Easy operation","human error reduction" and "connect ability" supporting productivity improvement for customers.

Operation

Pre-machining preparation


- The maintenance manual as well as maintenance log are supported.
- Reduction in machine down time from insufficient maintenance.

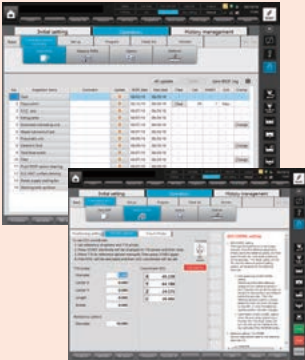

Setup


Changing electrodes, moving axes, and setting the working tank height.

- Workpiece measurement**
Positioning workpieces, measuring workpiece offset, and checking dimensions.
- Electrode measurement**
Measurement of electrode center, dimension check.




Program

- "Action menu" helps your operation. Table form programing display "ESPER D-CUBES".




Search machining condition

- The suitable condition is selected by factor selection and narrow down search.
- Adjustment bar for choosing "Speed" or "Uniformity".



Machining time estimation function

- Simply estimates machining time.
- Corrects the estimated time for improve estimated accuracy.




Check list

All necessary operations to be performed before machining can be checked.

Check list

- The pre- machining checklist is displayed.
- The machine cannot be started if any checklist item has been skipped.
- Errors by operators who are not accustomed to using the machine are prevented.




Machining Monitor Screen

Maisart realized the visualization of operation status on screen.

Automatic setting of adaptive control


- Our EDM know-how optimizes machining through automatic control settings.



Initial setting


To set items which do not change daily like probe information, origin position, jog movement speed e.t.c.

- Basic machine settings, such as axis movement speed, measurement operation, and ATC operation.



Main menu


Navigate you by three tabs to set and check the setting quickly. This enables anyone to use information easily without any confusion about operating procedures and operation methods.

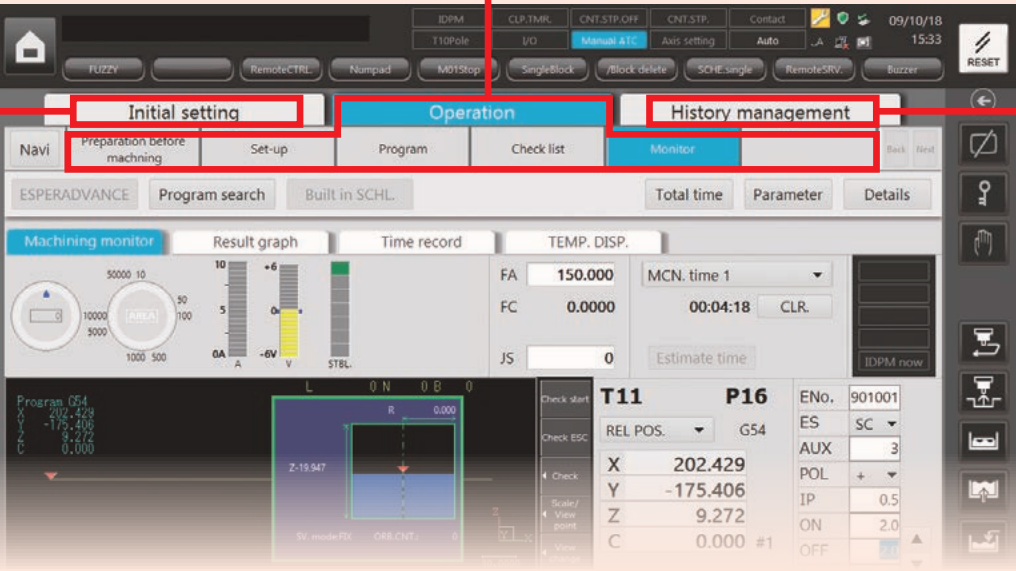

Machine log management

The operation event log, inspection and maintenance log consumables, and cost can be managed.


- Consumables management**
- The consumables screen manages usage time and replacement log of all consumables.

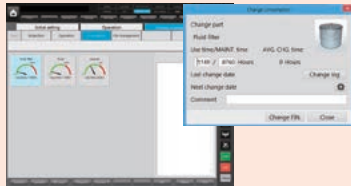

Automation Support *eFactory*

LS-10T/20T Tool changer

●Automatic electrode change enables continuous operation.

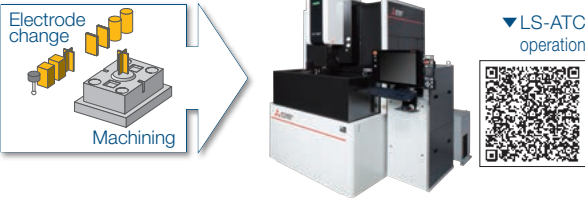

Automatic electrode/workpiece changer (1 robot, 2 EDMs)

●Robotic transfer devices automatically change electrodes and workpieces, enabling continuous operation.



Peripheral equipment/System extension options

Scheduling system

E.S.P.E.R SCHEDULE

- Execute continuous schedule operation of EDMs with job management^(*). (manage up to five EDMs)
- Control ID numbers, as well as monitor the mounting state of electrodes and the state of communications with the EDM and electrode / workpiece changing unit.

(*) A personal computer is required for installing applications


Machine remote monitor

- Visualizes workshop with monitor and notification for improving machine operating ratio.
- Remotely monitor machining with a personal computer.
- Mail notifications when an alarm occurs.

3D CAD/CAM system

Cam Magic AD

- 3D electrode model can be created easily, and electrode design CAD system handling orbit deformation.
- Die-sinker electrical-discharge CAM system, which calculates machining positions, automatically and eliminates input value mistake
- Operations can be sequenced to wire, milling and hole machining CAMs.

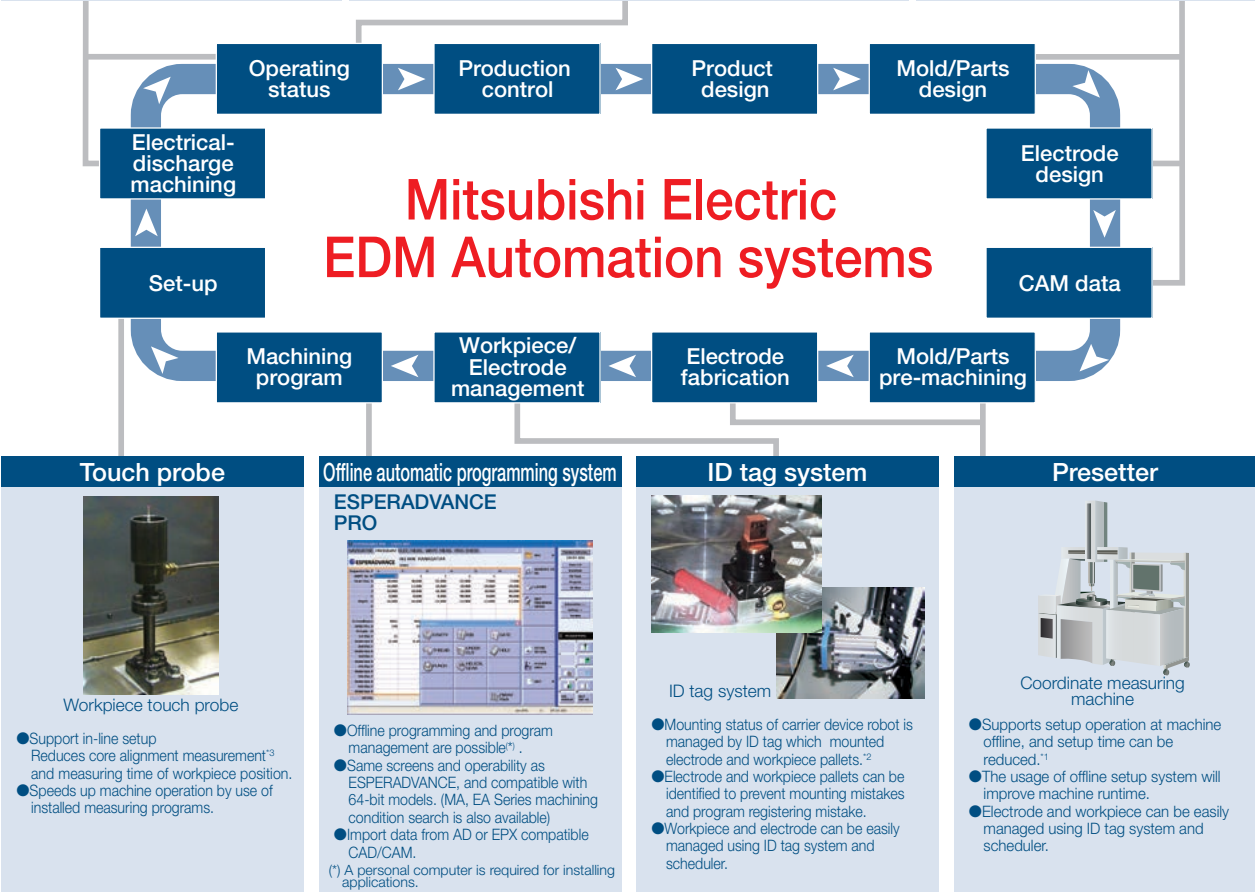

(Note 1) Please contact a Mitsubishi Electric representative for more information regarding the presetters and coordinate measuring machines.
(Note 2) Please contact a Mitsubishi Electric representative for more information regarding the ID tag systems.
(Note 3) Please contact a Mitsubishi Electric representative for more information regarding the touch probes.

MEMO

Blank lined area for notes.

Power Supply / Control Specifications and Options

Power Supply and Control Specifications

| Model | | SV8PM | SV12PM |
|-------------------|--|---|--------|
| Power supply unit | Power supply model | GV80P (option GV120P) | |
| | Maximum machining current peak [A] | 80 (option 120) | |
| | Standard machining circuit and functions | Transfer pulse circuit (TP circuit), Ultralow-wear machining circuit (SC, α-SC circuit), Fine-matte finish circuit (PS circuit), Glossy mirror-finish circuit (HGM,HGM2 circuit), HPS circuit, NP2 circuit, Narrow gap circuit, SS Jump, AI Adaptive control (Maisart/IDPM3), Lotus Leaf Texture (LLTX) glossy mirror-finish function | |
| | Power supply system | Compact, resistor-less, low-heat generation, power regenerating energy-saving method | |
| | Cooling system | Indirect cooling | |
| Control unit | Control unit | C41EA-2 | |
| | Input method | Keyboard, USB flash memory, Ethernet | |
| | Pointing device | Touch panel, mouse | |
| | Display | 19-in color TFT-LCD | |
| | Display characters | Alphanumeric characters | |
| | Number of control axes | Four axes (max.) | |
| | Setting (command) unit | XYZ···0.0001mm(.000004"), C (rotary axis) ···0.0001deg | |
| | Minimum drive unit | XYZ···0.0001mm(.000004"), C (rotary axis) ···0.0001deg | |
| | Manual feed | High-speed, low-speed, inching 0.001mm(.000004")/0.01mm(.00004"), extension mode (high-speed, low-speed), maximum feedrate: 7,000mm(275.6")/min(XYZ) | |
| | | | |

Power Facilities Capacity

| Model | SV8PM | | SV12PM | |
|--|-------|--------|--------|--------|
| Power supply | GV80P | GV120P | GV80P | GV120P |
| Maximum machining current average[A] | 60 | 100 | 60 | 100 |
| Maximum machining current peak[A] | 80 | 120 | 80 | 120 |
| Dielectric fluid chiller unit[kW] | 1.74 | 3.5 | 1.74 | 3.5 |
| Total input capacity [kVA] ^{*1} | 6.5 | 9.5 | 7.0 | 10.0 |
| Machine-generated heat value[kW] ^{*2,3} | 3.9 | 5.7 | 4.2 | 6.0 |

^{*1} Please add 5[kVA] for total input capacity with SP power supply specification.
^{*2} Reference value (heat value [kW] = Total input capacity (kVA) × 0.6)
^{*3} Please add 3[kW] for machine-generated heat value with SP power supply specification.

Network connection specifications (DNC, FTP)

Data, such as NC programs, machining conditions and variables can be exchanged between a personal computer and EDM.
The required options differ according to the models and purpose, and can be confirmed using the following table.
One IP address must be prepared for each EDM within the user's in-house network.

| Required specifications | Image drawing | Required option | Supplement |
|---|---------------|------------------------------|---|
| Operate on the EDM side and receive data from personal computer. | | LAN/W (standard) | Use EDM's Explorer and receive data in the common HDD on the EDM side. After that, data I/O operations are required. |
| Operate on the EDM side and send data directly to the EDM's NC data area. | | FTP (standard) | Data can be received only using data I/O operation. |
| Operate on the personal computer side and send data to the EDM. | | LAN/W (standard) | The personal computer's Explorer and the EDM's common HDD are used. After that, data I/O operations are required for the EDM. |
| Operate on the personal computer side and send data directly to the EDM's NC data area. | | DNC (standard) | Commercially available DNC software must be installed on the personal computer side. Refer to DNC specifications operation for details. |
| Automatically send data from machining machine to FTP server | | Operating status data output | Customer should prepare FTP server |

^{*4} Select the chuck from the following types. (3R-MACRO, 3R-Combi, EROWA-ITS50)
^{*5} For 3R Combi Macro and Macro Jr can be used.
^{*6} Only the ITS50 specification is available, and the centering plate 50 can be used.
^{*7} For ITS50 specification, the Centering plate 100 and 50 can be used.
^{*8} External signal output (M code with answer) is necessary for attaching external equipment that requires an answer signal.
^{*9} LAN cables should all be straight wiring with shielding connector, Category 5 (100BASETX compliant), STP (four-shielded twisted-pair). A switchable hub capable of supportin shielded LAN cables should be used.
^{*10} Proprietary personal computer is to be acquired separately.

Options


Options and retrofit specifications differ according to country and region; please contact a Mitsubishi Electric representative for details. Main options correspondence table:
○ Standard equipment,
○ Can be added after installation,
● Cannot be added after installation,
× Not available

| Model | | | | SV8PM | SV12PM | |
|--|---|--|------------------------|-------|--------|---|
| Machine main unit | Lubricant | Automatic lubrication unit | | ○ | ○ | |
| | Scale | Scale feedback specification | Z-axis | ○ | ○ | |
| | | | XY-axis | ○ | ○ | |
| | Thermal Buster (Thermal displacement correction system) | | | ○ | ○ | |
| | Granite table | | | ○ | × | |
| Thin LCD operation box | | | | ○ | ○ | |
| Dielectric fluid system | Dielectric fluid temperature control unit | | | ○ | ○ | |
| | Fluid system | Dielectric fluid emission automatic control function | | ○ | ○ | |
| | | Dielectric fluid suction function | | ○ | ○ | |
| | | Programmable flushing function | | ● | ● | |
| | | dielectric fluid distributor | | ○ | ○ | |
| Power supply | Main power supply | GV80P | | ○ | ○ | |
| | | GV120P | | ● | ● | |
| | Special power supply | NP2 circuit | | ○ | ○ | |
| | | Narrow gap circuit | | ○ | ○ | |
| | | glossy mirror-finish function (LLTX) | | ○ | ○ | |
| | | mirror-finish circuit (HGM2) | | ○ | ○ | |
| | | machining circuit for difficult-to-machine materials (HPS) | | ○ | ○ | |
| SP power supply (exclusive for tungsten carbide machining) | | ● | ● | | | |
| Head-side tooling | High-rigidity C-axis ^{*4} | | | ● | ● | |
| | High-accuracy built-in spindle ^{*4} | | | ● | ● | |
| | Automatic clamp ^{*4} | | | ● | ● | |
| | Removable holder (3R-16M-MACRO-R specification) | | | ○ | ○ | |
| ATC | Rack | 4T | 3R MACRO | ○ | ○ | |
| | | | EROWA ITS50 | ○ | ○ | |
| | 7T | 3R Combi | | ○ | ○ | |
| | | 10T | 3R MACRO | | ● | ● |
| | 3R Combi | | ● | ● | | |
| | EROWA ITS ⁵ | | ● | ● | | |
| | EROWA Combi ⁶ | | ● | ● | | |
| | 20T | | 3R MACRO | | ● | ● |
| | | | 3R Combi | | ● | ● |
| | | EROWA ITS ⁵ | | ● | ● | |
| | | EROWA Combi ⁶ | | ● | ● | |
| | MVH | 20T | 3R MACRO | | ● | ● |
| | | | 3R Combi | | ● | ● |
| | | | EROWA ITS ⁵ | | ● | ● |
| | | | 3R MACRO | | ● | ● |
| 40T | | 3R Combi | | ● | ● | |
| | | EROWA ITS ⁷ | | ● | ● | |
| Control unit | Communication | External signal output (M code) | | ● | ● | |
| | | External signal input/output (M code with answer) ⁸ | | ● | ● | |
| S/W | LAN, DNC H/W ¹⁰ , S/W, FTP ⁹ | | | ○ | ○ | |
| | ESPERADVANCE PRO lite ¹⁰ | | | ○ | ○ | |
| | ESPERADVANCE PRO ¹⁰ | | | ○ | ○ | |
| | 3D data import | | | ○ | ○ | |
| | e-manual (electronic instruction manual) | | | ○ | ○ | |
| | Built-in scheduler | | | ○ | ○ | |
| | Anti-virus protection | | | ○ | ○ | |
| Machine activity data output function | | | | ○ | ○ | |
| | Run timer | | | ● | ● | |
| | Warning light (Tower type) | | | ● | ● | |
| Display | Warning light (Built-in type) | | | ● | ● | |
| | Operation manual (paper) | | | ○ | ○ | |
| Miscellaneous | LED type working lamp | | | ○ | ○ | |

Head-side tooling


* Tooling should be selected

Removable holder

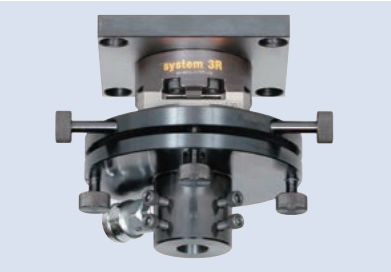


3R-16M-MACRO-R specifications

Automatic clamp

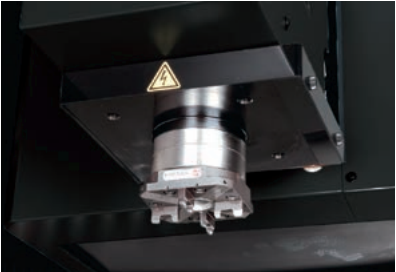

Clamp spindle side holder with air chuck (photo shows EROWA-ITS chuck specifications)

High-rigidity C-axis

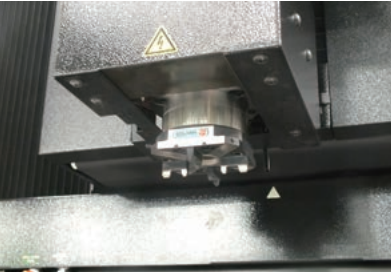

Supports parallel electrode setup and index machining
Supports fluid emission from spindle center (photo shows 3R-MACRO chuck specifications)

ATC

LS-10T (automatic tool changer)



Change up to 10 electrodes
Supports continuous machining using many electrodes

LS-20T (automatic tool changer)



Change up to 20 electrodes
Supports continuous machining using many electrodes

MVH-20T/40T (automatic tool changer)



Change up to 20/40 electrodes
Supports continuous machining using many electrodes

Display

Warning light (Built-in type)



Machine operating status


Warning light (Tower type)




Machine operating status

Tooling

EROWA System Chart

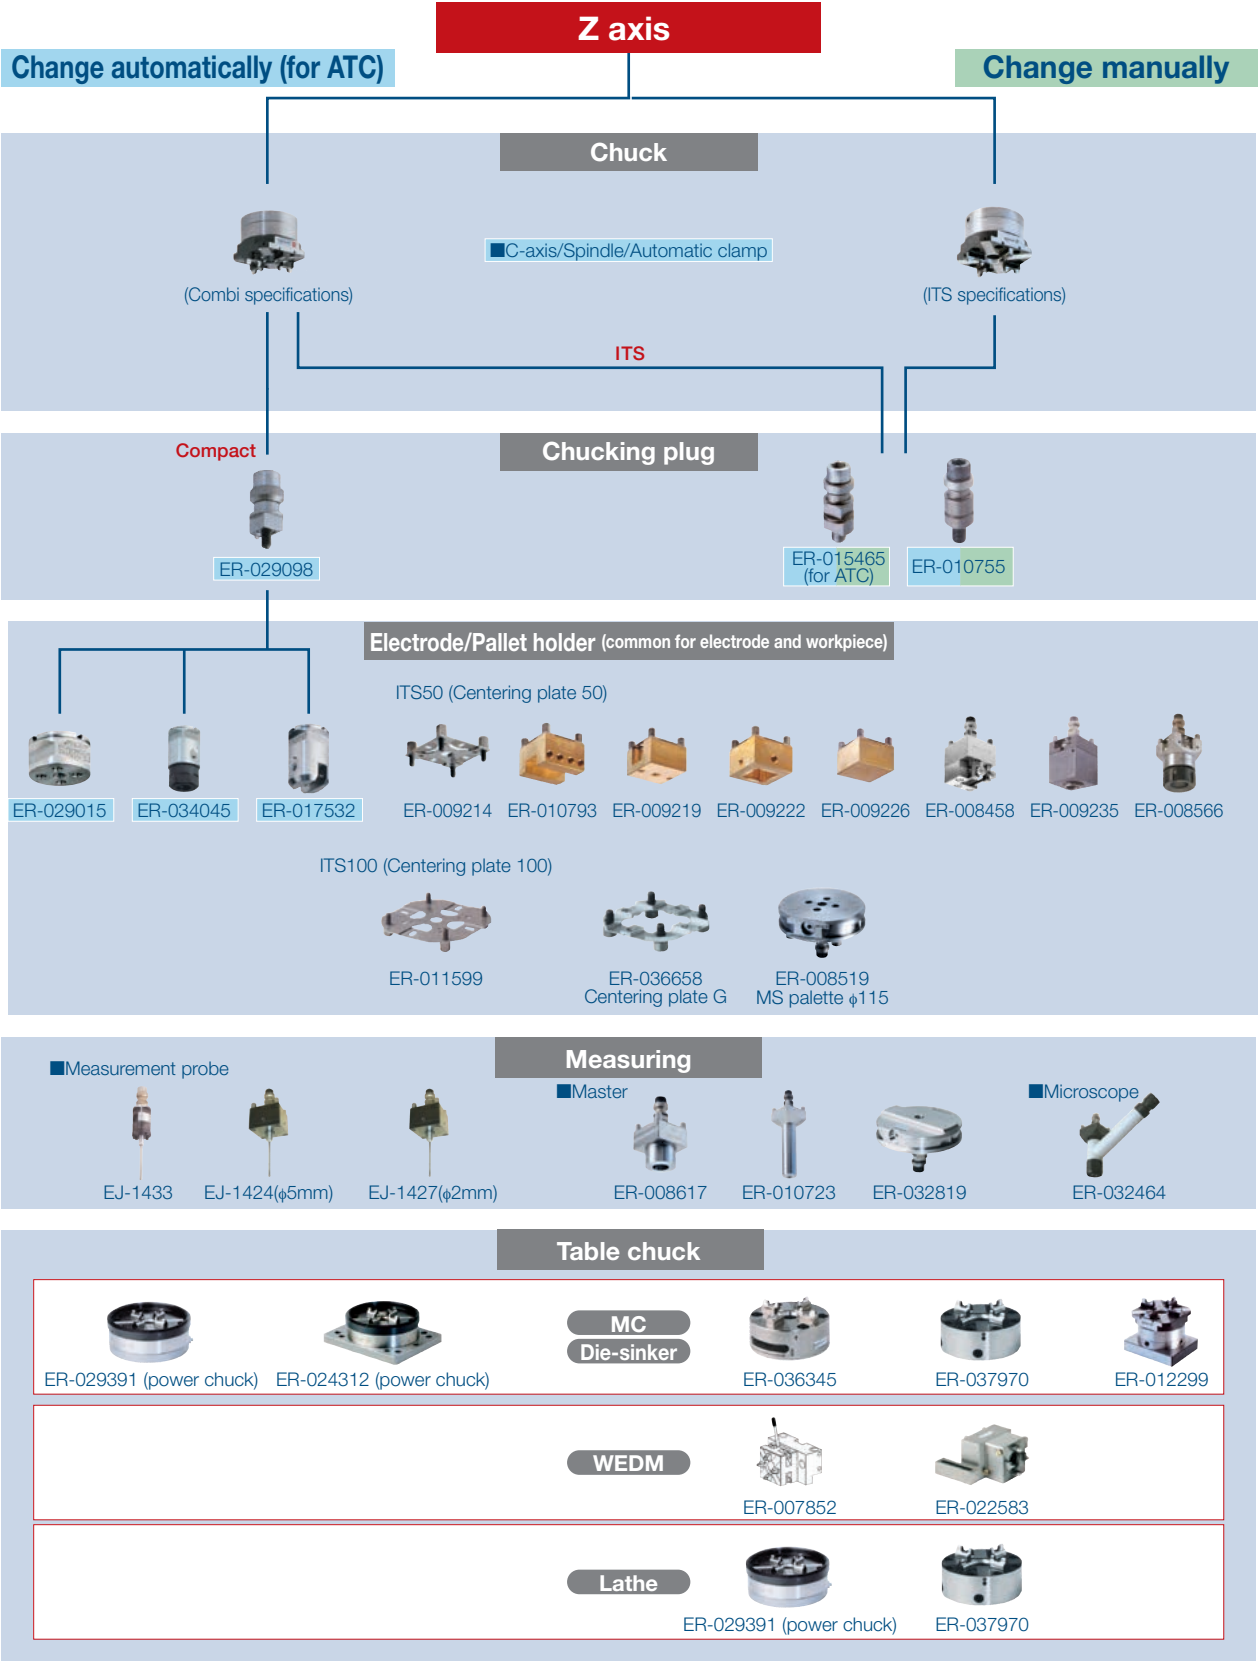

System 3R System Chart

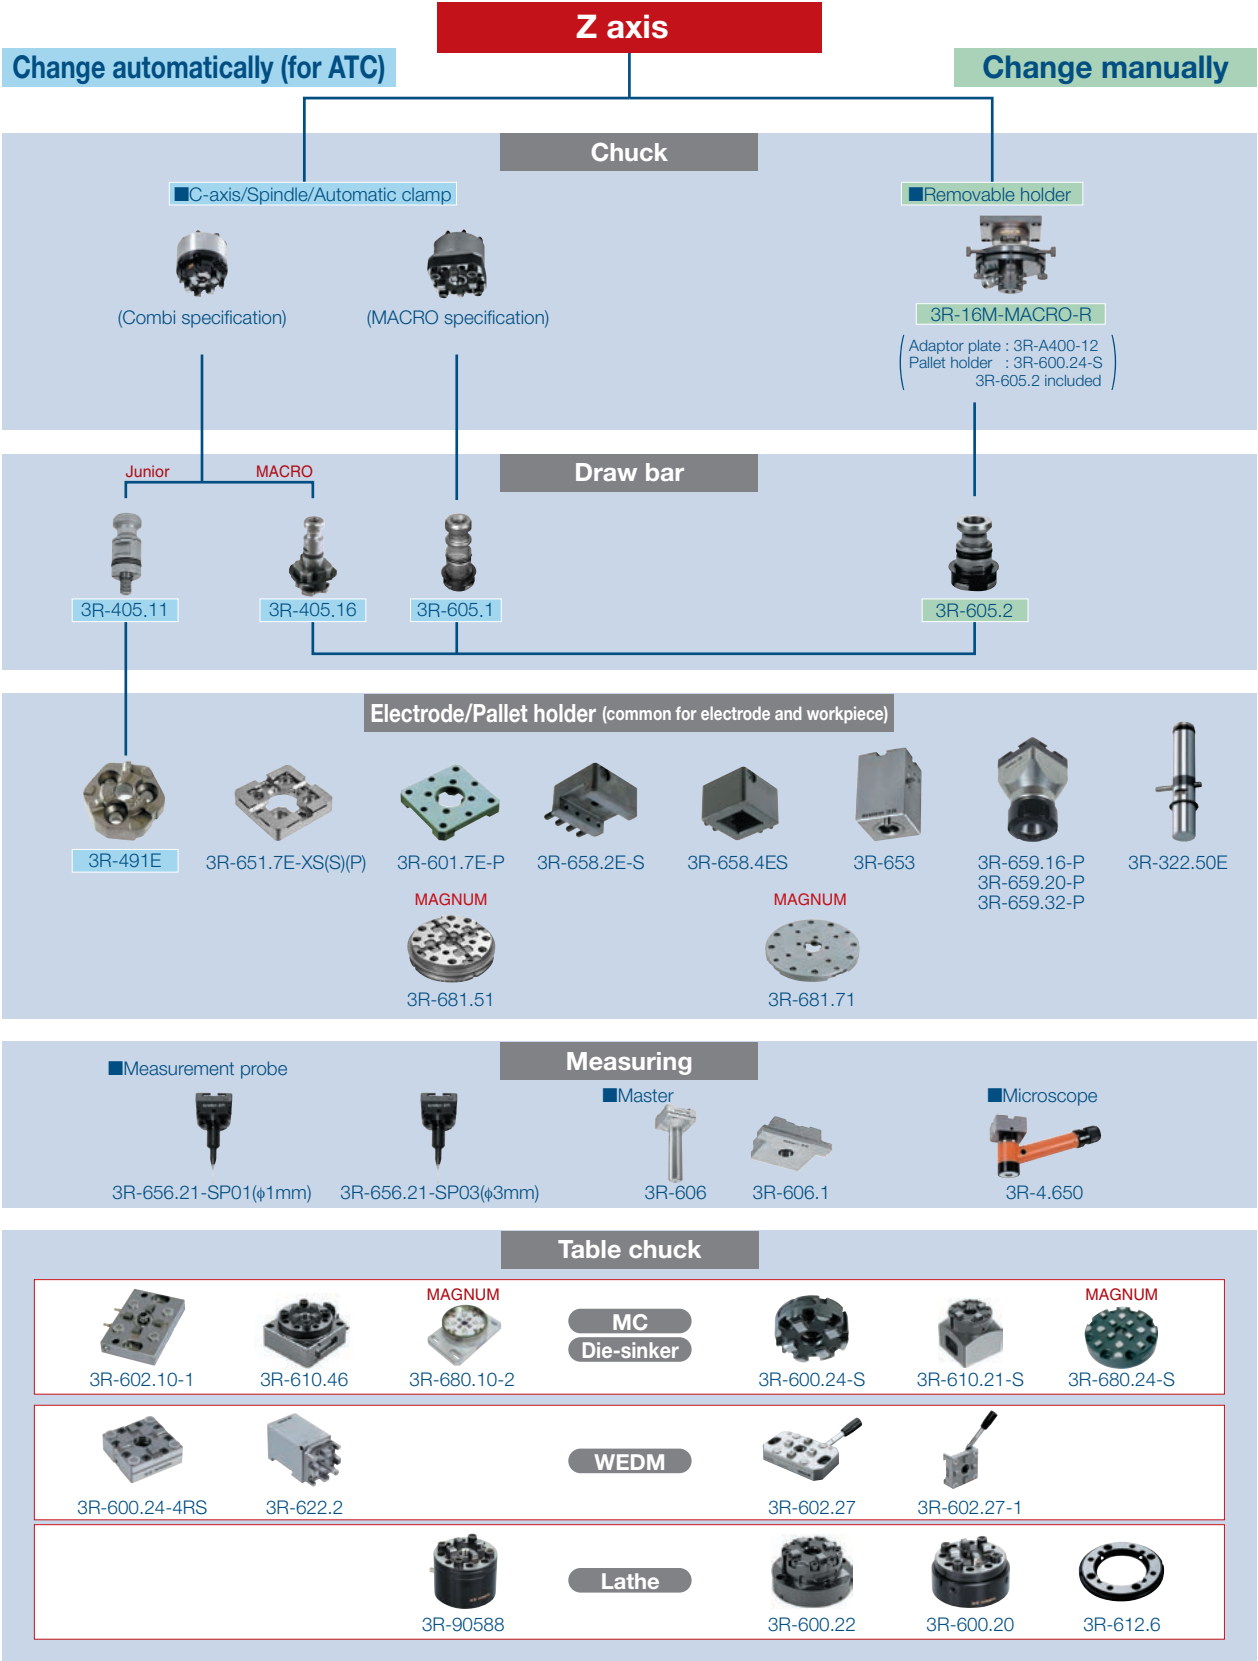

* Please contact EROWA Japan Co., Ltd. for detailed tooling specifications.

* Please contact System 3R Co., Ltd. for detailed tooling specifications.

Preparation for Machine Installation / Cautions

Preparation for Machine Installation

Machine installation checklist

Determining the machining details

Check each item, and make sure that no item or order is overlooked.

| | |
|---------------------------------------|--|
| 1) Determine the workpiece | |
| 2) Determine the machining site | |
| 3) Determine the pre-processing site | |
| 4) Determine the post-processing site | |

Preparation of installation fixtures

| | |
|--|--|
| 1) Plan the installation fixtures | |
| 2) Prepare or manufacture the fixtures | |

Preparation of tooling and electrode

It normally takes one to two months for tooling delivery, so please place orders as early as possible

| | |
|---|--|
| 1) Determination of tooling and electrode | |
| 2) Order, preparation or manufacture | |

Training of programmers and operators

| | |
|---|--|
| 1) Select the programmers and operators | |
| 2) Apply for training seminars | |

Confirmation of foundation and power-supply work

If there is any possibility of radio disturbance, investigate it prior to starting work.

| | |
|--|--|
| 1) Confirmation of floor area | |
| 2) Confirmation of environment (constant-temperature dust-proof room, measure for radio disturbance, prevention of external noise) | |
| 3) Confirmation of foundation floor | |
| 4) Foundation work | |
| 5) Primary wiring for power lead-in | |
| 6) Grounding work | |
| 7) Air piping work | |

Confirmation of delivery path

Check the path inside and outside the factory to avoid any trouble during delivery.

| | |
|--|-----|
| 1) Traffic restrictions to factory | |
| Road width | |
| Entry road | |
| 2) Factory entrance and width of gate in factory | (m) |
| Factory building entrance dimensions (height x width) | (m) |
| 3) Constant-temperature dust-proof room entrance dimensions (height x width) | (m) |

Cautions

The standard delivery entrance dimensions for standard shipment delivery are given on the product line-up page. If the entrance is smaller than the standard delivery entrance, a machine with different dimensions can be shipped.

* Please contact a Mitsubishi Electric representative for details (a separate estimate will be issued).

Note that delivery may not be possible in some cases depending on the dimensions.

File applications to fire department (Installation in Japan)

The applications must be filed before the EDM is installed.

| | |
|---|--|
| 1) Confirm the dielectric fluid amount | |
| 2) File applications to fire department (EDMs already installed must also be filed.) | |
| •Application for "Facility using fire" (fluid amount less than 400ℓ) | |
| •Application for "Low volume hazardous material storage and handling site" (fluid amount more than 400ℓ and less than 2,000ℓ) | |
| •Application for "General handling site" (fluid amount 2,000ℓ or more) | |

The required applications differ according to country and region; please contact your nearest fire department for details.

Oil for EDMs

Always use dielectric fluid which has a flash point of 70°C or more.

Prepare the following dielectric fluid when operating the EDMs.

■Dielectric fluid example (Showa Shell Sekiyu Shell Paraol 250)

Table of dielectric fluid properties

| Item | Product brand | Shell Paraol 250 |
|------------------------------------|---------------|---------------------|
| Density g/cm³ (@ 15°C) | | 0.797 |
| Flash point °C (PM) | | 92 |
| Kinematic viscosity mm²/s (@ 40°C) | | 2.42 |
| Appearance | | Clear and colorless |

*Please contact the manufacturer for the Material Safety Data Sheet (SDS/MSDS).

■Dielectric fluid example <JX Nippon Oil & Energy Metal Work EDF-K2>

Table of dielectric fluid properties

| Item | Product brand | Metal Work EDF-K2 |
|------------------------------------|---------------|---------------------|
| Density g/cm³ (@ 15°C) | | 0.770 |
| Flash point °C (PM) | | 93 |
| Kinematic viscosity mm²/s (@ 40°C) | | 2.2 |
| Appearance | | Clear and colorless |

*Please contact the manufacturer for the Material Safety Data Sheet (SDS/MSDS).

Installation conditions

1. Installation site

- ①Constant-temperature dust-proof room
 - Recommended room temperature 20±1°C (68°F±2)
 - Usable temperature range 5 to 35°C (41°F to 95°F)
 - Temperature fluctuation will directly affect machine accuracy. To maintain performance accuracy, select a place with minimal temperature fluctuation.
 - Note that an environment where the temperature fluctuates by 3°C (5°F) or more within 24 hours, or 1°C (2°F) or more within one hour can adversely affect machining accuracy. Make sure that the machine body is not subject to direct wind from air-conditioners or to direct sunlight.
 - Dust-free location is recommended.
 - Install a EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust.
 - Grinding dust can adversely affect the machine's linear scales and ball screws.
 - Pay special attention to installation location to avoid this hazard (separate from grinding machine, or install in separate room, etc.).
 - Humidity Within 30 to 75%RH (with no dew condensation).
 - Temperature range during transportation and storage
 - 25 to 55°C (-13°F to 131°F) (when power is not connected).
- ②Tolerable vibration of floor
 - EA8S/12S, EA28V ADVANCE, EA40/EA50 ADVANCE specification
 - Select a floor where vibration or impact will not be conveyed.
 - As a reference, the vibration level should have a max. amplitude of 5µm or less at a 10 to 20Hz frequency.
 - SV8P, SV12P, EA8PS, EA12PS
 - Select a floor where vibration or impact will not be conveyed.
 - As a reference, the vibration level should have a max. amplitude of 2µm or less at a 10 to 20Hz frequency.
 - Consult with the contractor or vibration measuring instrument manufacturer for details on the measuring method.
- ③Foundation
 - The floor should be concrete with a thickness of 400mm (15.7") or more so it can sufficiently withstand the system's weight.
- ④Room construction
 - The room where the EDM is to be installed must be a non-flammable or fire-proof structure.
 - Please contact your local fire department for details.
- ⑤Ventilation of combustible vapors
 - Install a ventilator to effectively remove combustible vapors and fine powders.

- 2. Machine heating value
 - Use the equipment capacity to calculate the EDM's heating value required for designing a constant-temperature room.

| |
|--|
| Heating value (kW) = Equipment capacity (kVA) x 0.6 Example: For SV12P + GV80P, 7.0kVA x 0.6 = 4.2kW |
|--|

The above value is a guideline. Consult with the constant-temperature room manufacturer for details.

3. Power-supply equipment

- Primary wiring
 - Normal machining : 3-phase 200/220VAC±10% 60Hz, 3-phase 200VAC±10% 50Hz
 - High-accuracy machining : 3-phase 200/220VAC±4% 60Hz, 3-phase 200VAC±4% 50Hz
 - An automatic voltage regulator (AVR) should be used if voltage fluctuations exceed that value above
 - Do not power on in instantaneous power failure occurrence that exceeds 20msec.
 - A single-phase AC night power source for the automatic fire extinguisher : 100VAC±10%(50/60Hz)
- Power capacity
 - Facility capacity [kVA] = Total power input (Machine input + power supply input + dielectric fluid chiller unit input) [kVA]
 - Refer to page 25 for details on the machine, power supply and dielectric fluid chiller unit
- No-fuse breaker and earth-leakage breaker
 - When selecting a no-fuse breaker or earth-leakage breaker for the primary side of the EDM, calculate the total facility capacity, and select the breaker using the following table as a reference.

| Total facility capacity [kVA] | No-fuse breaker | Earth-leakage breaker |
|-------------------------------|-----------------|-----------------------|
| ~11.9 | NF50-CV (50A) | NV50-CV (50A) |
| 12~21.9 | NF100-CV (100A) | NV100-CV (100A) |
| 22~33 | NF225-CV (150A) | NV225-CV (150A) |


The breakers in the table allow for the rush current of the transformer in the power supply panel.

- Selecting the power input cable size
 - The following table is a guide for calculating the appropriate power cable size to use based on total capacity. The cable size should be sufficient to allow some leeway.

| Total facility capacity [kVA] | Cable size [mm²] | Total facility capacity [kVA] | Cable size [mm²] |
|-------------------------------|------------------|-------------------------------|------------------|
| ~8.9 | 5.5 | 15~20.9 | 22.0 |
| 9~11.9 | 8.0 | 21~28 | 30.0 |
| 12~14.9 | 14.0 | | |

4. Grounding work

- The EDMs must always be grounded to prevent external noise, radio disturbance and earth leakage.
- Install a EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust.
- Common grounding can be used if noise from other devices will not enter through the common grounding; the grounding cable must be connected independently to the grounding location (Fig. 2).
- Use a 14mm² grounding wire.

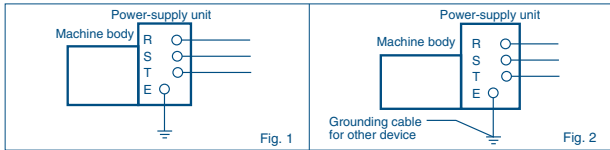


5. Primary air equipment

- The standard SV-P specifications do not require an air source, but an air supply must be prepared when using the optional high-accuracy built-in C-axis etc.
- Hose diameter : 1/4 hose (hose sleeve outer diameter: φ9.0 (0.35"))
- Pressure : 0.5 to 0.7MPa (72.5 to 101.5psi)
- (0.6MPa (87) or more when using EROWA tooling specifications)
- Flow rate : 27 ℓ /min or more (2.65cu.ft./min.)

6. Shield room

Install a shield room if the EDM affects televisions or other communication facilities in the area. Observe the following points when installing the EDM in the shield room.

- Ground the EDM in the shield room (Fig. 3).
- If the EDM cannot be grounded in the shield room, connect the EDM's grounding cable to the shield room's grounding terminal (through bolt) as shown in Fig. 4.
- Consult with a Mitsubishi Electric representative for details on installing a shield room.

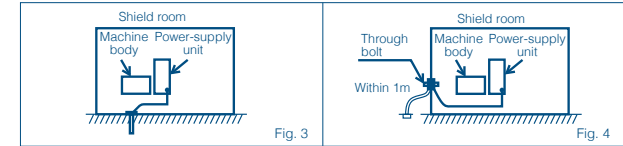


Precautions for selecting earth-leakage breaker

To prevent malfunctions caused by the external noise from control units, etc., a filter is installed for the power-supply input. By grounding one end of this filter, an earth-leakage current of approx. 30 to 40mA passes through the filter. A highly sensitive earth-leakage breaker (sensitivity current 30mA) could malfunction. Thus, a medium-sensitivity earth-leakage breaker (sensitivity current 100 to 200mA) is recommended for the EDM. Class C grounding (grounding resistance of 10Ω or less) is recommended for the EDM. Even if the sensitivity current is 200mA, the contact voltage will be 2V or less, and no problems will occur in preventing electric shock (application of tolerable contact current Class 2, 25V or less).

Cautions

Preventing fires and accidents with EDMs

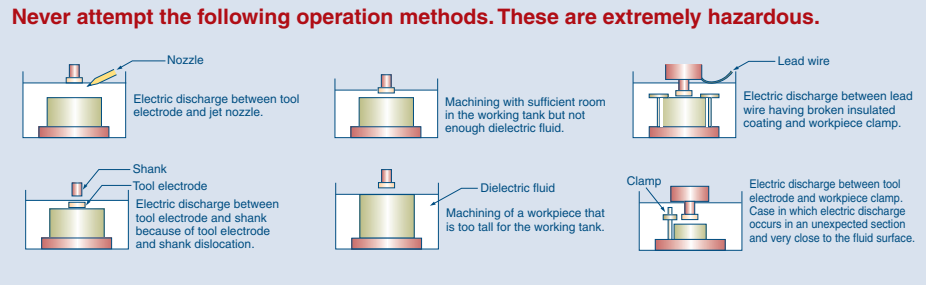

- Ensure that the upper part of the workpiece is submerged by 50mm (1.97in) or more GV80P or 100mm (3.94in) or more GV120P from the surface of the dielectric fluid
- Never conduct spray machining as there is a risk of fire
- Do not use equipment that produces heat or sparks such as heating systems, welding machines, or grinding machinery near the EDM
- Always keep the area clean and tidy, and do not store flammable materials near the EDM
- Install an extra fire extinguisher in addition to the automatic fire extinguisher enclosed with the EDM
- Ensure that the area is sufficiently ventilated
- Monitoring automatic operation : For safety purposes, make sure an operator is always present during operation, even if various safety devices are equipped, so that appropriate actions can be taken

Safety measures

A dielectric fluid temperature detector, fluid level detector, abnormal machining detector and automatic fire extinguisher, standard equipment, and a flame-resistant metal hose is used. A tank which has passed the type test of electrical-discharge machine of Hazardous Materials Safety Techniques Association is used (for tank capacities less than 2,000 ℓ , tanks which have passed a voluntary water leakage test). Note that the safety devices must be periodically inspected. Refer to the instruction manual (safety manual) when using the EDM.



Automatic fire extinguisher
When heat is detected, a light-water solution is automatically sprayed to extinguish the fire. Machining also stops automatically at this time.
A separate 100VAC power supply is required for the automatic fire extinguisher.



Dielectric fluid temperature and fluid level detector
Machining is automatically stopped when the dielectric fluid temperature reaches approx. 60°C, or when the fluid level drops during machining.

Terms of warranty

1. Terms of warranty

This will differ according to country and region of sale; please contact a Mitsubishi Electric representative for details.

2. Coverage

- (1)Terms of repairment free of charge
 - Parts labor and travel are included free of charge when the failure occurs during normal use for the stated Terms of the warranty (based on proper usage and maintenance as described in the operations manual and sales agreement).
- Coverage exceptions:
 - ①When a failure occurs that was caused by a machine modification that directly affects the machine's functioning or accuracy.
 - ②When a failure occurs caused by the use of non-standard parts, consumables or lubricants.
 - ③When a failure occurs caused by a natural disaster such as lighting, earthquake or storms and flooding.

- ④When the use of non-recommended consumables or aftermarket parts are used such as filters or flushing nozzles.
- (2)Exclusion of loss in opportunity and secondary loss from warranty liability
 - Regardless of the gratis warranty term, Mitsubishi shall not be liable for compensation to:
 - ①Damages caused by any cause found not to be the responsibility of Mitsubishi.
 - ②Loss in opportunity, lost profits incurred to the user by Failures of Mitsubishi products.
 - ③Special damages and secondary damages whether foreseeable or not, compensation for accidents, and compensation for damages to products other than Mitsubishi products.
 - ④Replacement by the user, maintenance of on-site equipment, start-up test run and other tasks.
 - (3)Information regarding what should be revised or improved acquired during product support may be used to improve product quality or services.

3. Post Warranty / Expected Service Life

After the warranty period expires, all standard service rates and travel expenses will apply. Normal service life expectancy is 11 years after installation, but there may be some cases where discontinued electrical parts such as semiconductors and motors will reduce this period.

MEMO

FA Machinery and Automation Products

Global Production Bases



①Nagoya Works
Programmable controllers, display panels (HMI), AC servos, inverters, industrial robots, CNCs for power distribution transformers, EDMs, laser processing machines



②Kani Factory
Electromagnetic switchgear



③Shinshiro Factory
3-phase motors, IPM motors



④Fukuyama Works
Power management meters, energy-saving UPS support devices, low-voltage circuit breakers



⑤Nagatsugawa Works
Pressurized ventilators



⑥Power Distribution Systems Center
High-voltage circuit breakers, high-voltage electromagnetic contactors



⑦Mitsubishi Electric Factory Industrial Products Corporation
Geared motors



⑧Tada Electric Co., Ltd.
Electron-beam processing machines



⑨China (Dalian)
Mitsubishi Electric Dalian Industrial Products Co., Ltd.
Inverters, low-voltage circuit breakers, electromagnetic switchgear EDMs, laser processing machines



⑩India (Pune)
Mitsubishi Electric India Pvt. Ltd.
Inverters



⑪Thailand (Bangkok)
Mitsubishi Electric Automation (Thailand) Co., Ltd.
3-phase motors




⑫China (Xiamen)
Mitsubishi Electric Low Voltage Equipment (Xiamen) Co., Ltd.
Low-voltage circuit breakers



⑬China (Changshu)
Mitsubishi Electric Automation Manufacturing (ChangShu) Co., Ltd.
Programmable controllers, display panels (HMI), AC servo CNCs



YOUR SOLUTION PARTNER

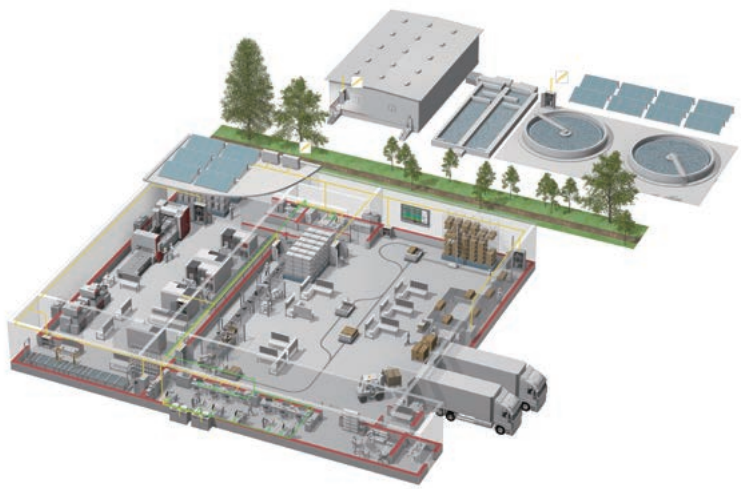

Mitsubishi Electric offers a wide range of automation equipment from PLCs and HMIs to CNC and EDM machines.

A NAME TO TRUST

Since its beginnings in 1870, some 45 companies use the Mitsubishi name, covering a spectrum of finance, commerce and industry.

The Mitsubishi brand name is recognized around the world as a symbol of premium quality.

Mitsubishi Electric Corporation is active in space development, transportation, semi-conductors, energy systems, communications and information processing, audio visual equipment and home electronics, building and energy management and automation systems, and has 237 factories and laboratories worldwide in over 121 countries.

This is why you can rely on Mitsubishi Electric automation solution - because we know first hand about the need for reliable, efficient, easy-to-use automation and control in our own factories.

As one of the world's leading companies with a global turnover of over 4 trillion Yen (over \$40 billion), employing over 100,000 people, Mitsubishi Electric has the resource and the commitment to deliver the ultimate in service and support as well as the best products.



Low voltage: MCCB, MCB, ACB



Medium voltage: VCB, VCC



Power monitoring, energy management



Compact and Modular Controllers



Inverters, Servos and Motors



Visualisation: HMIs



Numerical Control (NC)



Robots: SCARA, Articulated arm



Processing machines: EDM, Lasers, IDS



Transformers, Air conditioning, Photovoltaic systems

* Not all products are available in all countries.